

KMX-715G3-H110

■ 特点


- 支持Intel® 6/7/8/9th Generation Celeron/Pentium/Core-I series processor, TDP up to 95W
- 支持2条 DDR4-1866/2133/2400/2666MHz SO-DIMM slots, up to 64GB
- 1 x PCIeX16, 1 x PCIeX4(X2 link), 2 x PCIeX4(X1 link), 3 x PCI slots
- 4 x USB3.0(5Gpbs), 4 x USB2.0, 内置一个USB2.0加密狗
- COM1-2:RS232/RS485, COM3-6:RS232
- 支持HDMI, DP, VGA异步双显




■ 规格

产品名称		KMX-715G3-H110
硬件配置	CPU	Intel® 6/7/8/9th generation Celeron/Pentium/Core-I series processor, TDP up to 95W
	芯片组	Intel® H110芯片组
	内存	2 x DDR4 260-pin 1866/2133/2400/2666MHz SO-DIMM slots, up to 64GB
	存储	1 x M.2-2242/2280 Key M slot(SATA3.0 Signal) 2 x SATA3.0 (up to 6Gb/s)
	USB	4 x USB3.0(5Gpbs), 4 x USB2.0, 内置一个USB2.0加密狗
	COM	COM1-2:RS232/RS485, COM3-6:RS232
	以太网	LAN1:i219-V LAN2:i210AT
	VGA	最高分辨率 1920 x 1080@60Hz, 支持异步双显
	HDMI	最高分辨率 4096 x 2160@30Hz, 支持异步双显
	DP	最高分辨率 4096 x 2160@60Hz, 支持异步双显
	Audio	Realtek ALC897 codec, 1 x Mic-in, 1 x Line-in, 1 x Line-out
	PCI	3 x PCI (32bit)
	PCIE	1 x PCIeX16(Gen3) slot 2 x PCIeX4(Gen2, X1 link) slots, 1 x PCIeX4(Gen2, X2 link) slot
	看门狗	1~255级可编程设置
操作系统	OS	Windows 7/8.1(Only support with Intel 6th Gen. CPU), Windows 10, Linux
电源	输入电压	AC100~240V, 50-60Hz
机械参数	结构	全钢型箱体结构
	尺寸	370mm x 326mm x 180mm
	净重	13Kg
环境	工作温度	0°C ~ 45°C (使用SSD)
	存储温度	-20°C ~ 60°C (使用SSD)
	相对湿度	5~95% (40°非凝结)
	振动	使用SSD:5~500Hz, 1.5Grms, 遵循IEC60068-2-64
	冲击	使用SSD:10G(持续时间11ms, 半正弦波), 遵循IEC60068-2-27
EMC		CE/FCC Class A


■ 715G3横放尺寸 (单位:mm)

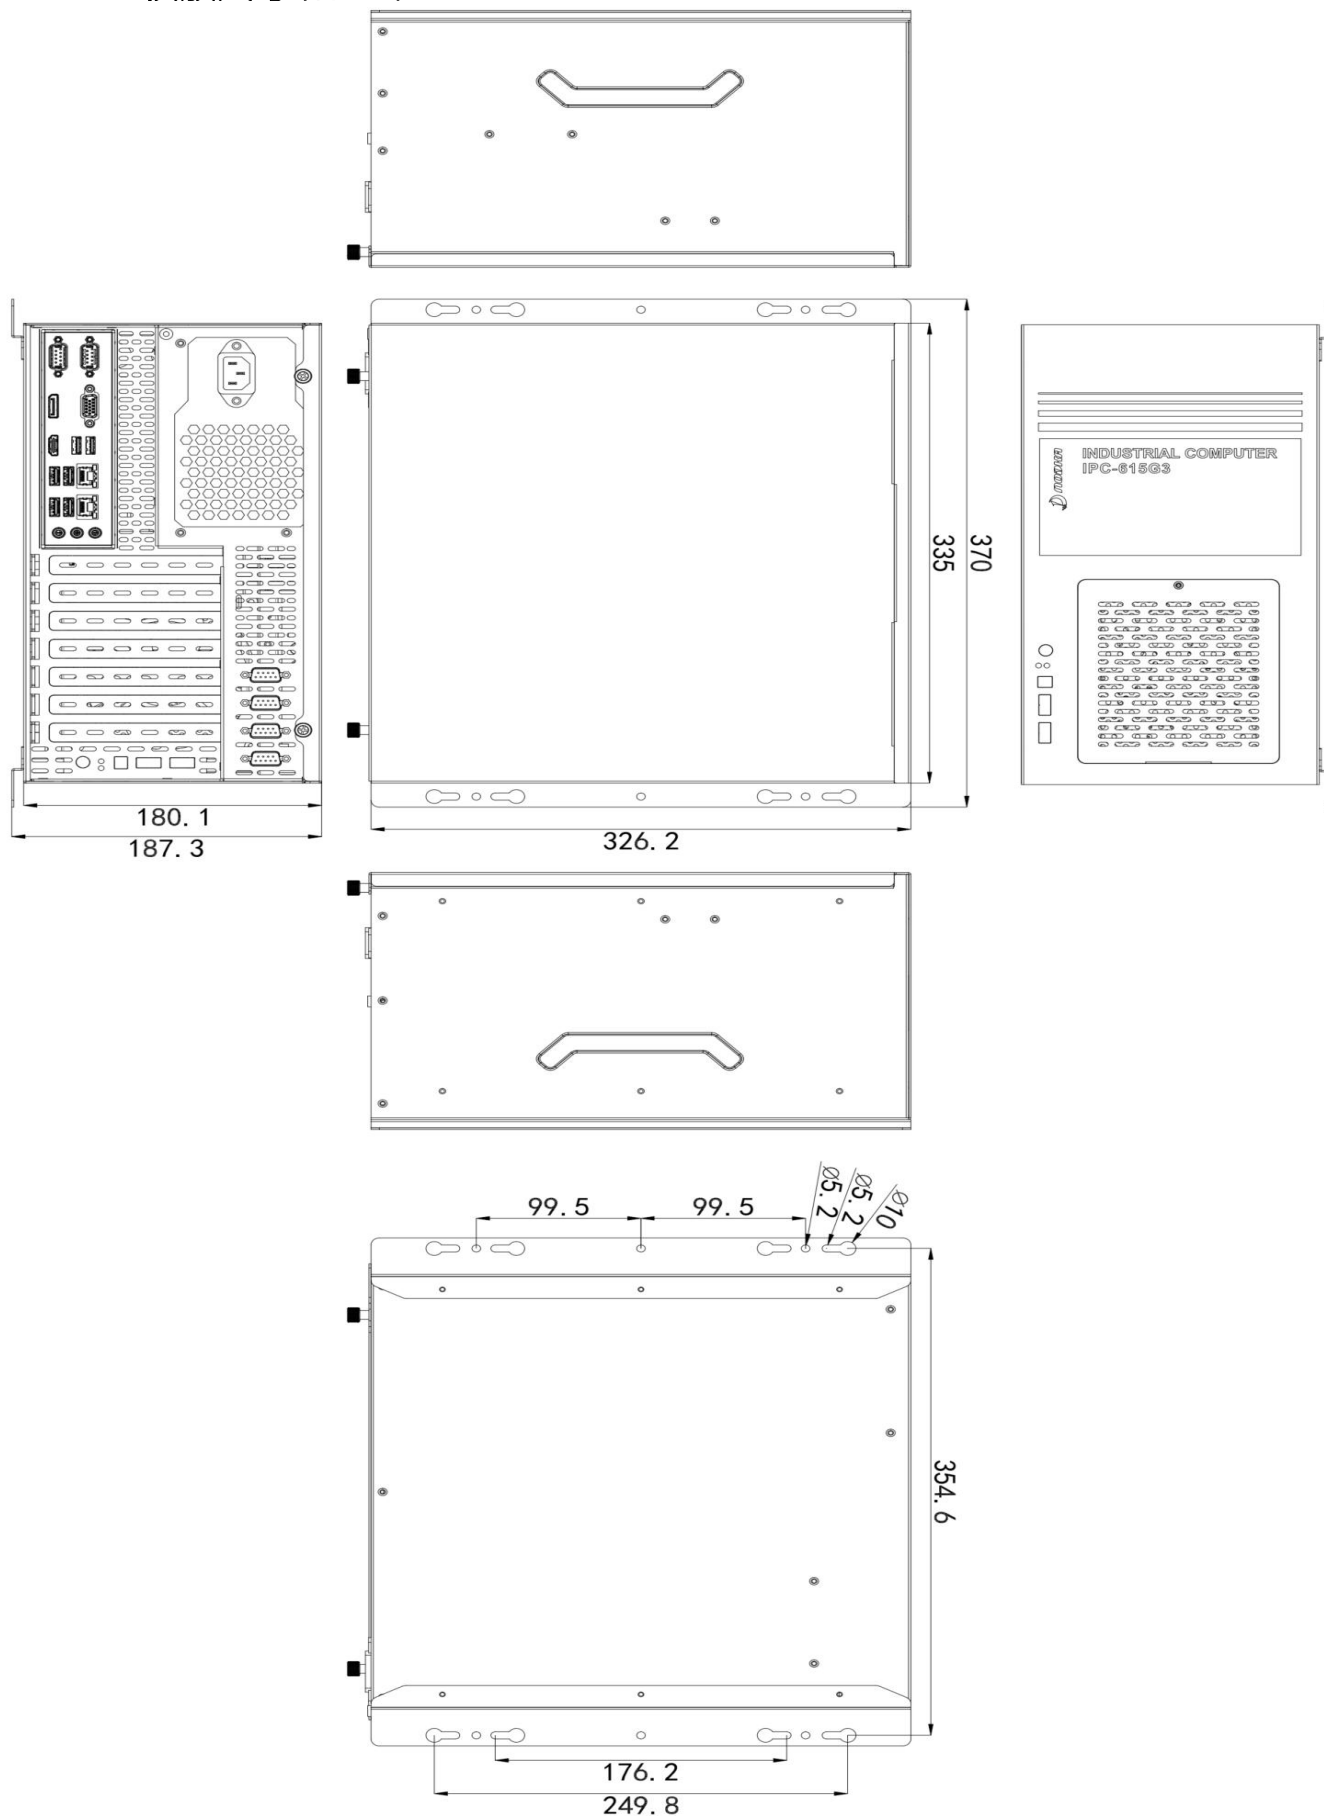

■ 715G3竖放尺寸 (单位:mm)

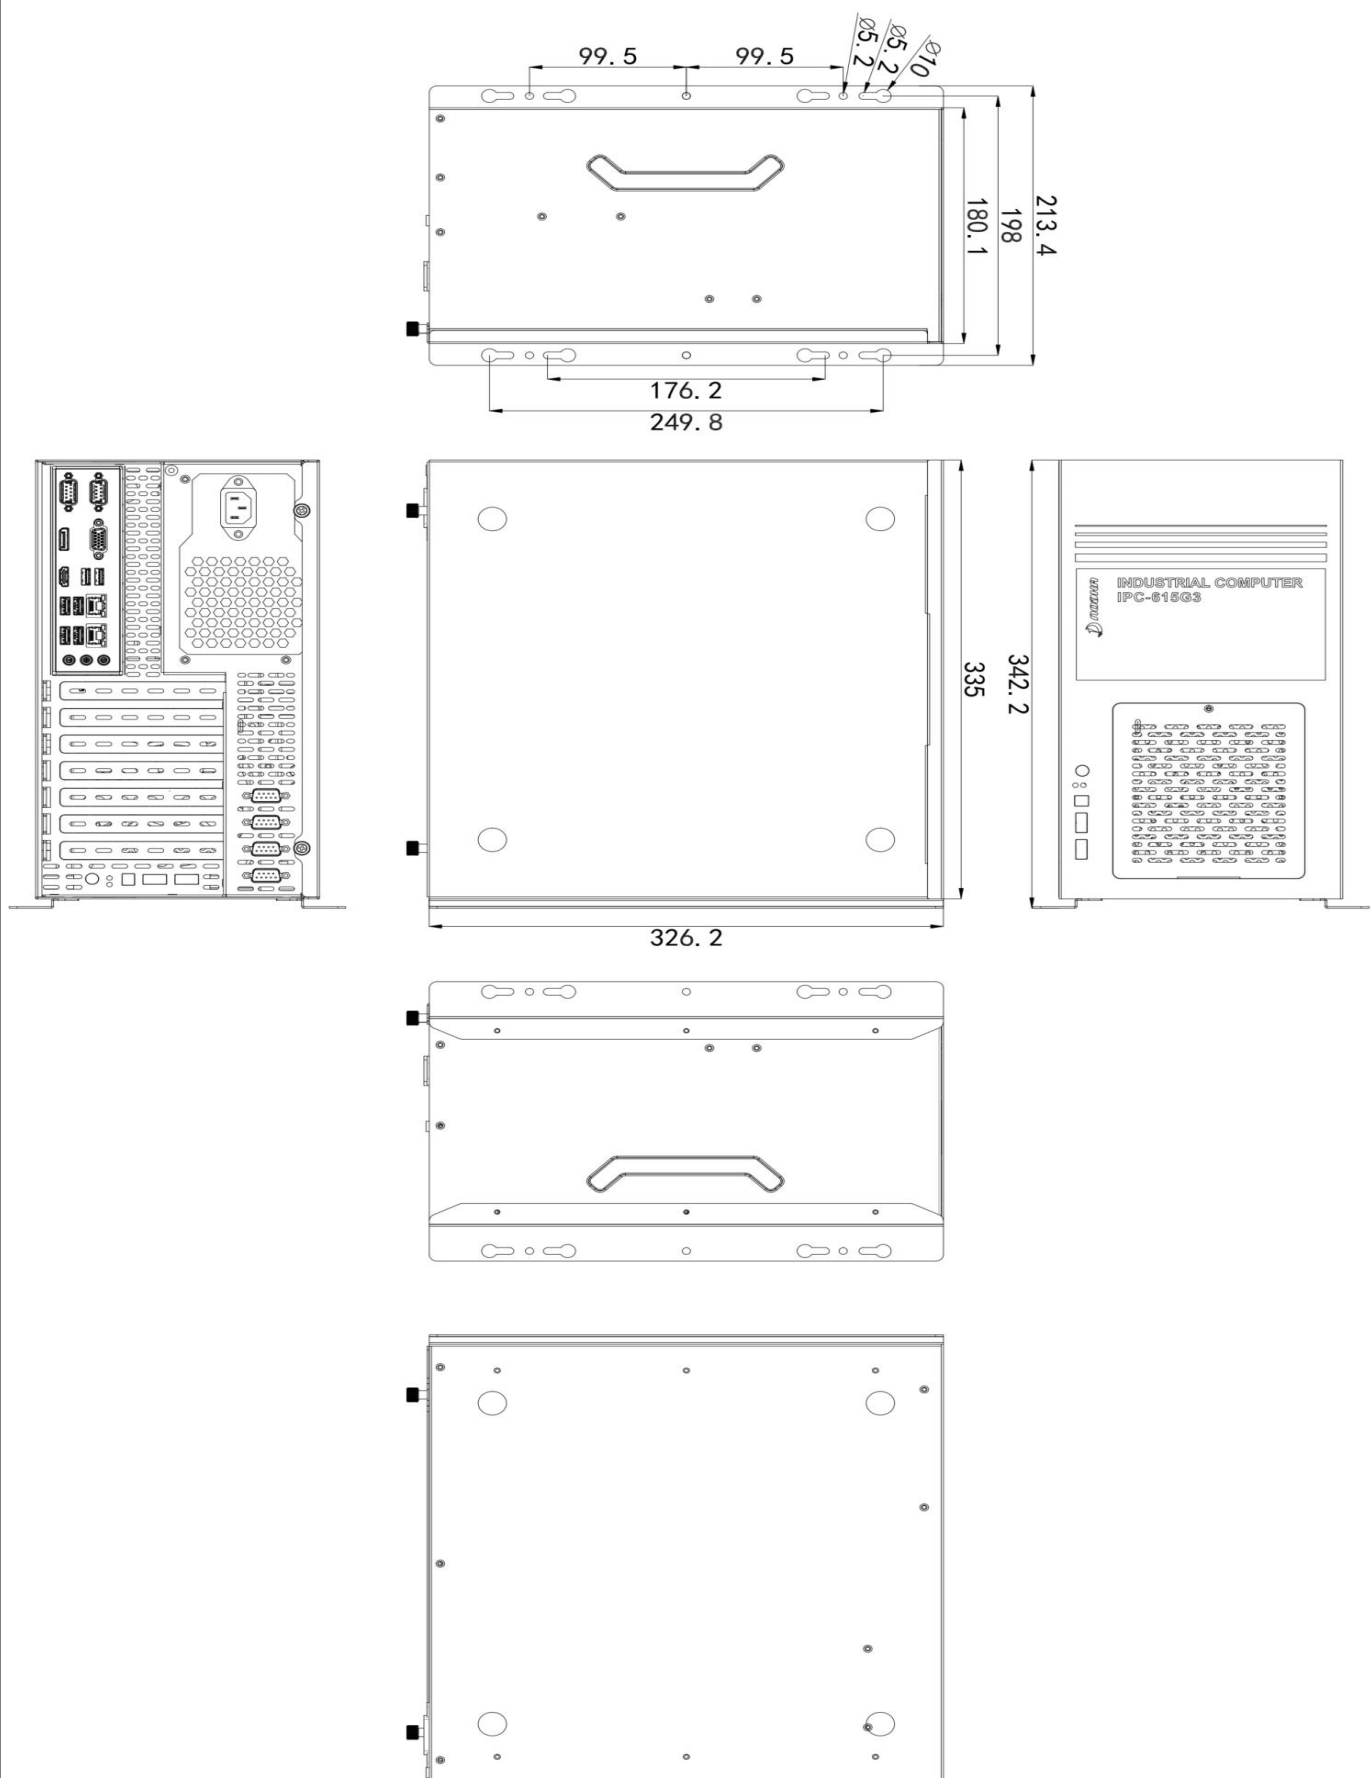

接口

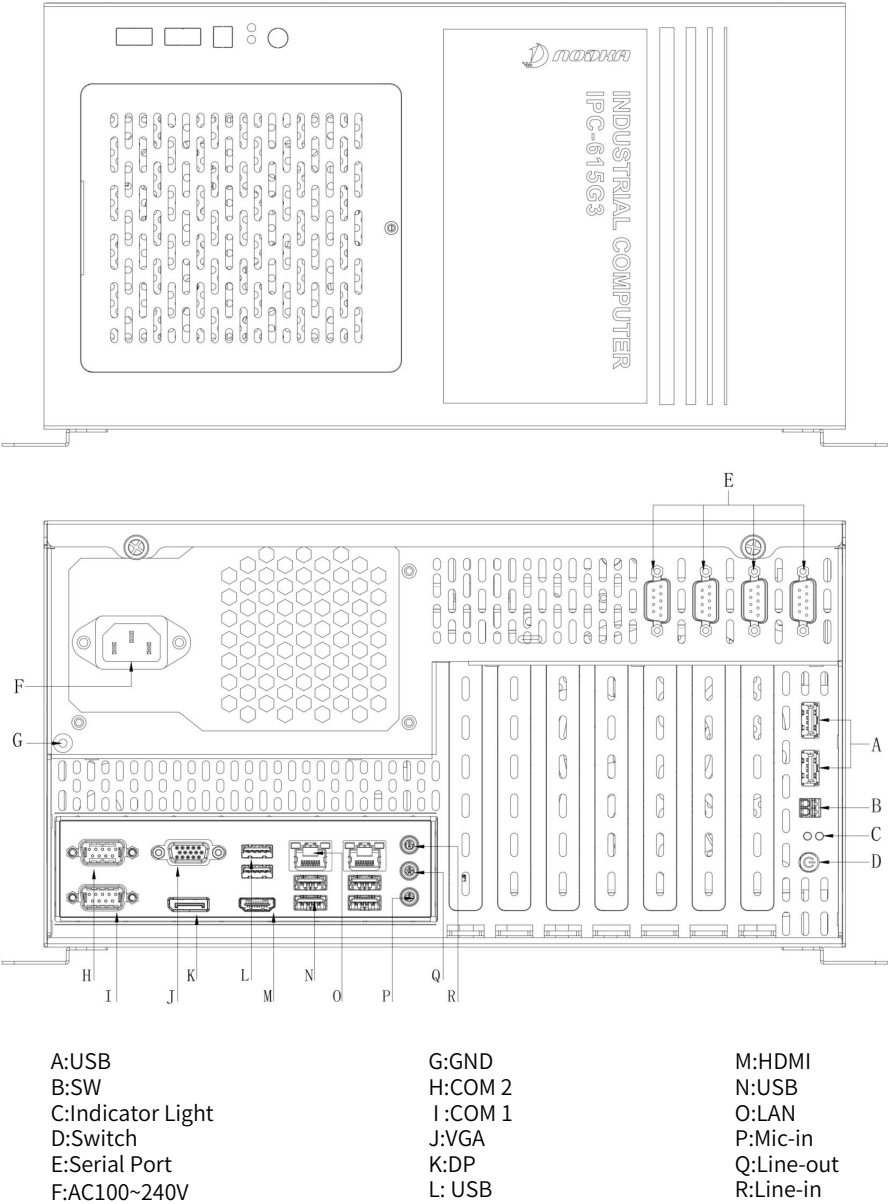

订购信息

料号	产品名称	描述
B64.615G3.H1.0013	KMX-715G3-H110	准系统:6/7/8/9代CPU/双内存笔记本DDR4插槽/M.2硬盘位/4PCIe/3PCI/含1.8M 国标电源线

选配件

配件	描述
CPU	6500,7500,8700,9500... ..
DDR4笔记本内存	8GB,16GB,32GB
2.5固态硬盘	128GB,256GB,512GB... ..
M.2固态硬盘(2242/2280)	256GB,512GB,1TB... ..
3.5寸硬盘	1T,2T,4T... ..