


KMX6-EXXX

- 强固型无风扇工业平板电脑
- Intel® Core® 处理器

■ 特点

- ◆ 10.1"/12.1"/15"/15.6"/17"/21.5"
- ◆ Intel® N97/Core i3/i5/i7等多型号处理器
- ◆ DDR4-3200MHz 内存插槽，最高支持32GB
- ◆ 多点电容式触摸屏
- ◆ 支持12V直流输入
- ◆ 超紧凑机身适合多种运用场景，前面板IP65设计
- ◆ 支持VESA桌面式、开放式多种安装

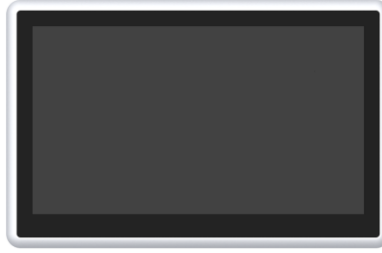


■ 规格




产品名称		KMX6-E101	KMX6-E121	KMX6-E150	KMX6-E156	KMX6-E170	KMX6-E215
硬件配置	CPU	Intel® Processor N97/Intel® Core i5-7200U/i7-7500U/i3-1215U/i5-1235U/i7-1255U					
	内存	1 x DDR4-3200MHz SO-DIMM slot, up to 32GB					
	存储	1 x M.2-2242/2280 M Key硬盘卡槽 (SATA3.0/NVME)					
	USB	4 x USB3.0					
	COM	4 x RS-232(COM1可调RS-485)					
	以太网	2 x Realtek 8111H 1000Mbps RJ-45以太网接口					
	其他I/O接口	1 x POWER/1 x DC IN /1 x HDMI/1 x VGA/1 x AUDIO					
	扩展槽	1 x Mini-PCle slot, 可扩展4G/WIFI					
显示	尺寸	10.1" TFT LCD	12.1" TFT LCD	15" TFT LCD	15.6" TFT LCD	17" TFT LCD	21.5" TFT LCD
	分辨率	1280 x 800	1024 x 768	1024 x 768	1920 x 1080	1280 x 1024	1920 x 1080
	亮度	500cd/m2	500cd/m2	350cd/m2	250cd/m2	250cd/m2	250cd/m2
	对比度	1000: 1	1200: 1	1000: 1	800: 1	1000: 1	1000: 1
触摸屏	类型	多点电容式触摸屏 (默认10点)					
	透光率	≥ 87%					
	控制器	USB 2.0					
操作系统	OS	Windows10, Linux					
电源	输入电压	DC 12V=5A (N97、7200U、7500U CPU) DC 12V=7A (12代CPU)					
机械参数	结构	坚固的铝镁合金外壳，支持VESA桌面式、开放式多种安装，前面板IP65等级					
	整机尺寸	269mm x 188mm x 53mm	315mm x 250mm x 58mm	368mm x 292mm x 60mm	400mm x 257mm x 53mm	409mm x 341mm x 60mm	549mm x 341mm x 60mm
	开孔尺寸	261mm x 180mm	307mm x 242mm	358mm x 282mm	392mm x 249mm	398mm x 331mm	539mm x 330mm
	VESA	100mm x 100mm					
	净重	2.18kg	3.2kg	4.25kg	3.22kg	5.32kg	6.52kg
环境	工作温度	0 ~ 50°C					
	存储温度	-20 ~ 60°C					
	相对湿度	5~95% @40° (non-condensing)					
	振动	SSD applied:1.5Grms,IEC 60068-2-64,random,5~500Hz,1 hr/axis					
	冲击	SSD applied:10G,IEC 60068-2-27,半正弦波，持续11ms					
	EMC	-					


■ 尺寸图 (单位: mm)

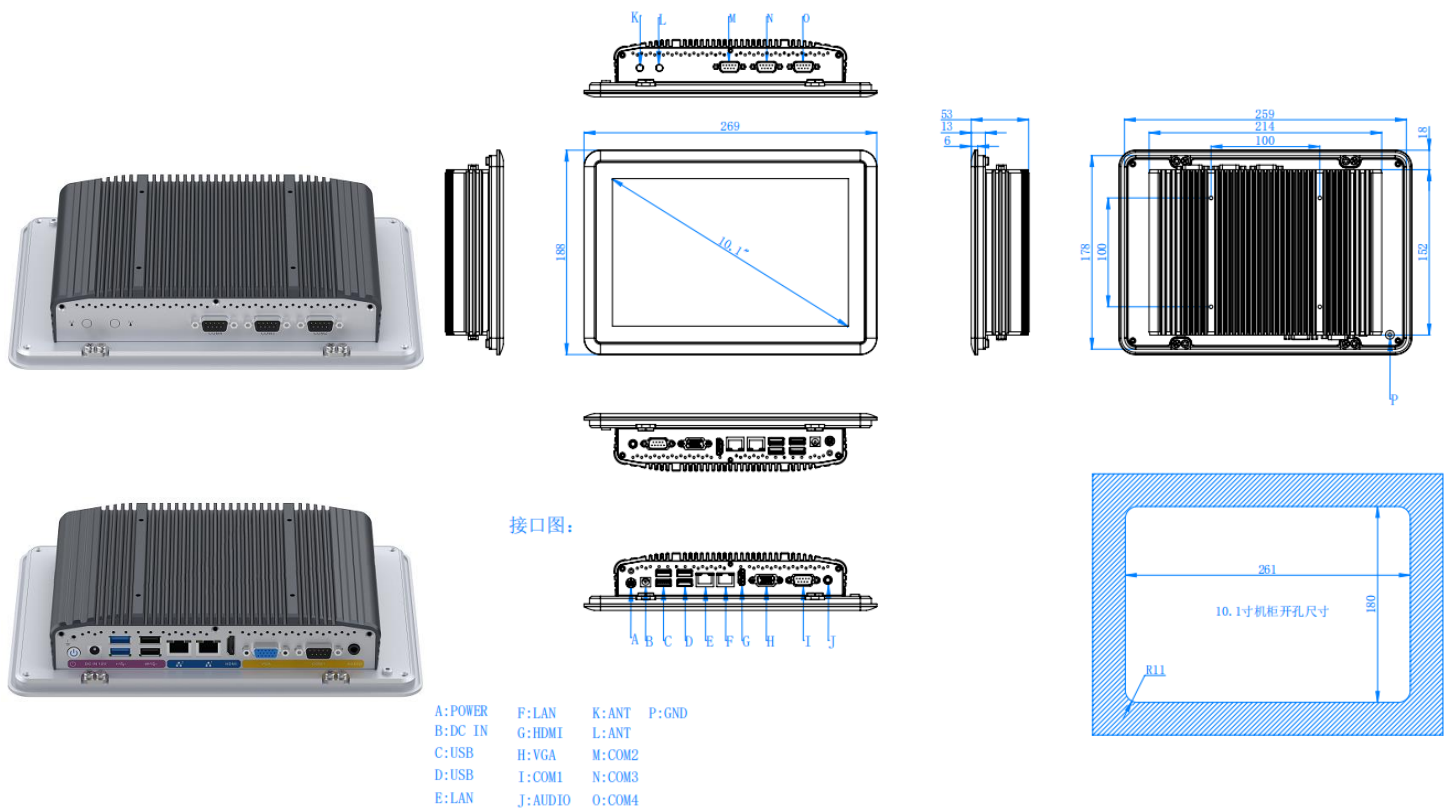


■ 尺寸图 (单位: mm)

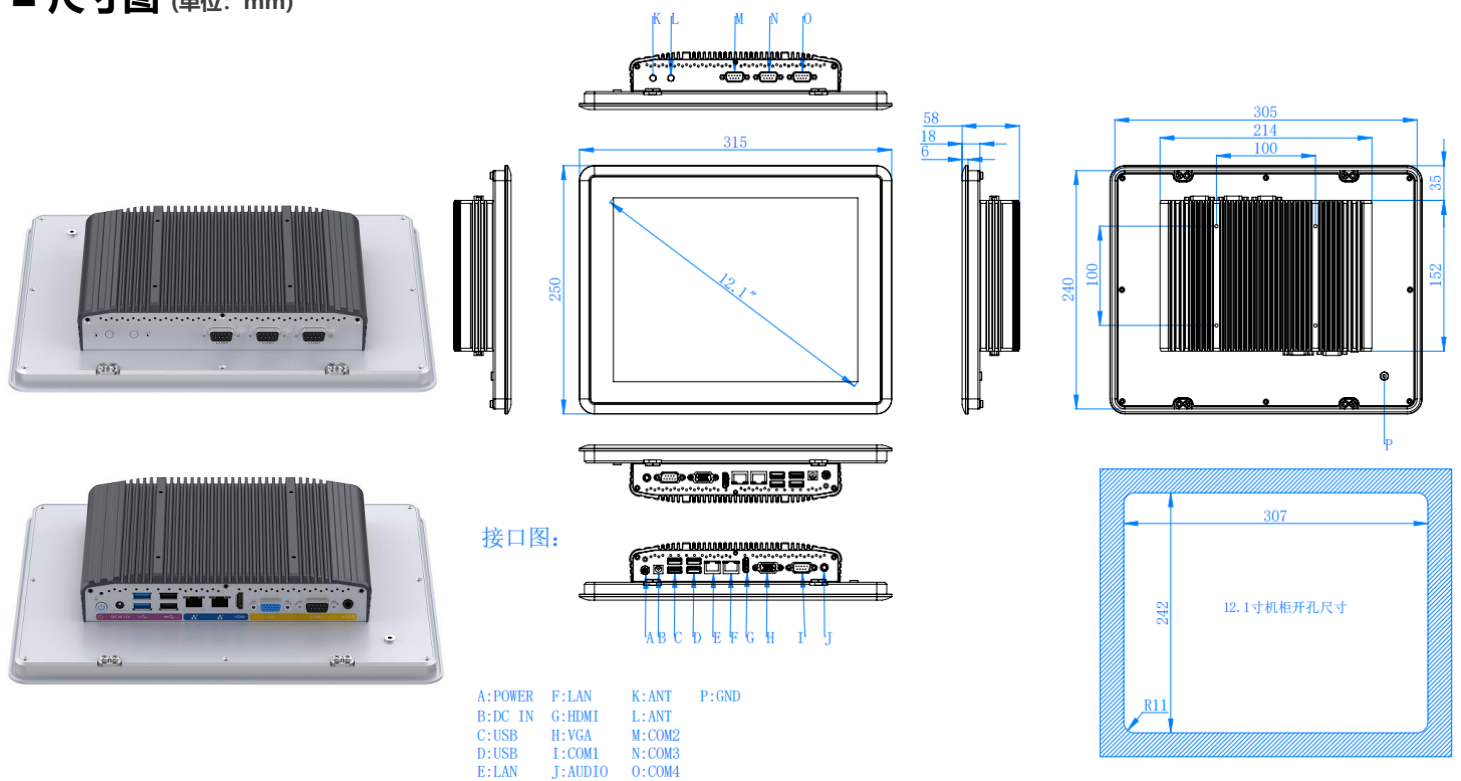


■ 尺寸图 (单位: mm)

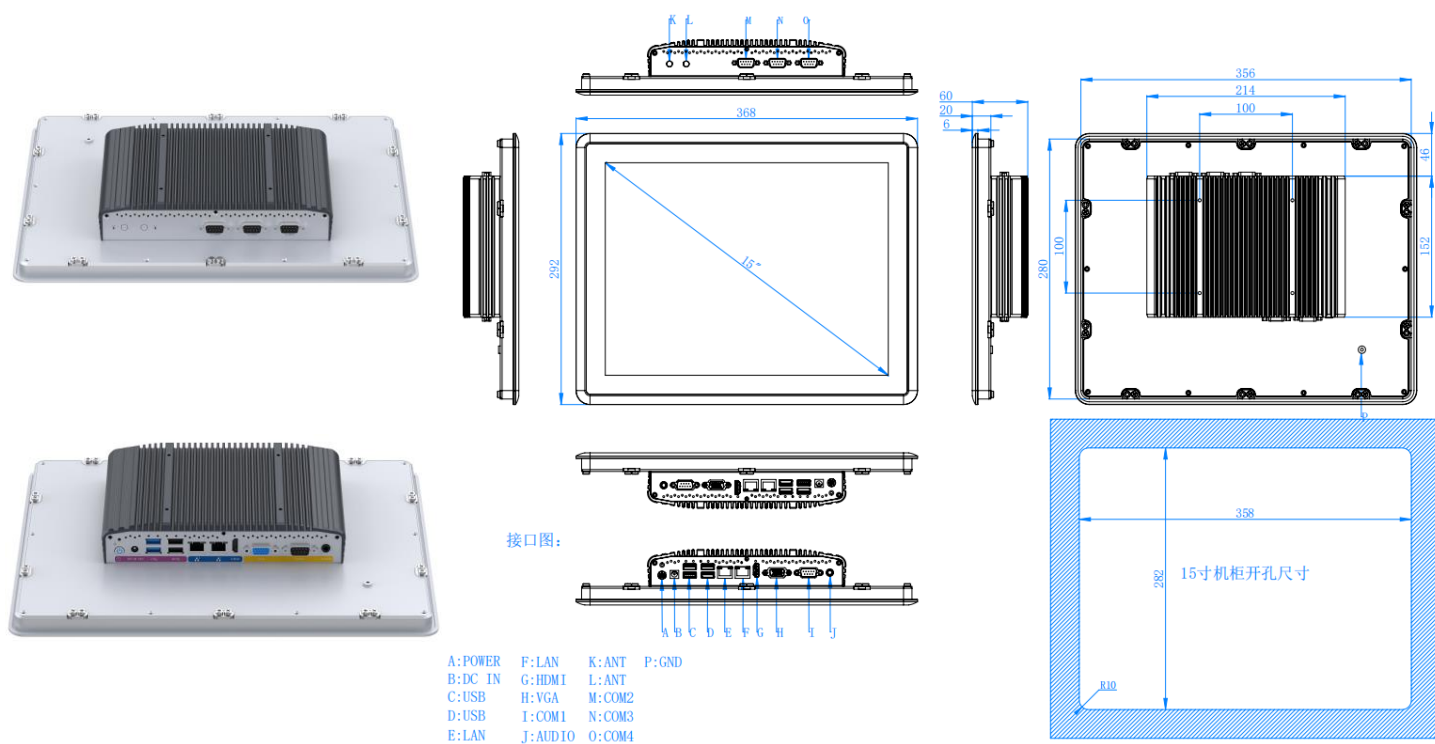


■ 尺寸图 (单位: mm)

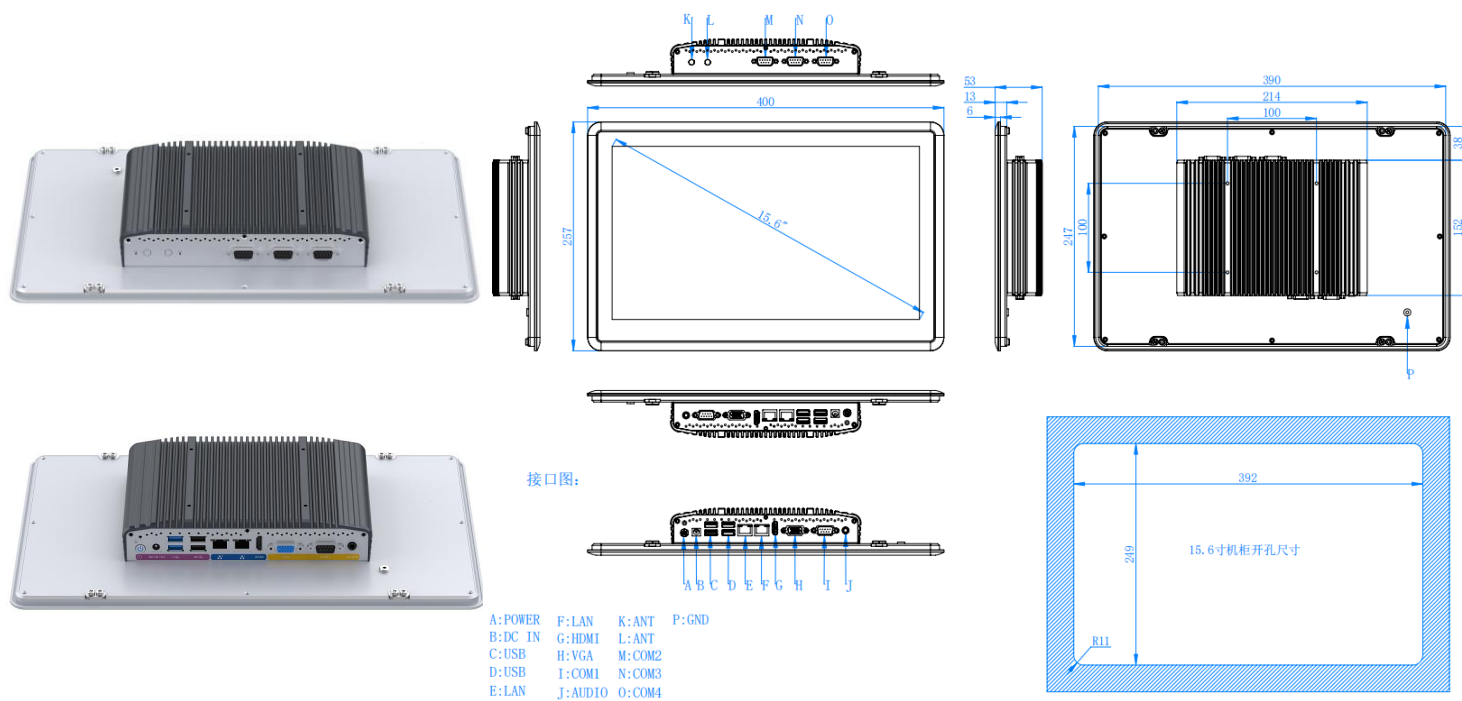

■ 尺寸图 (单位: mm)

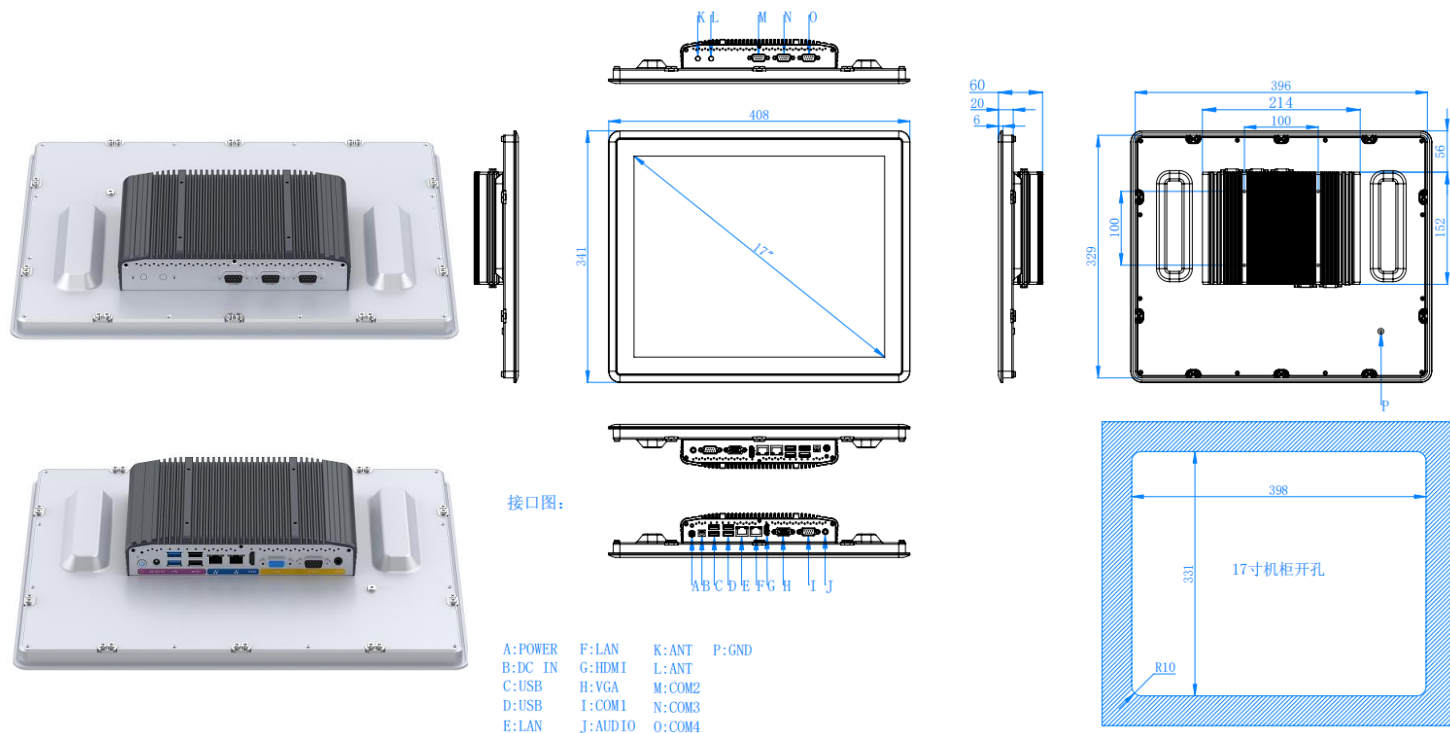

■ 尺寸图 (单位: mm)

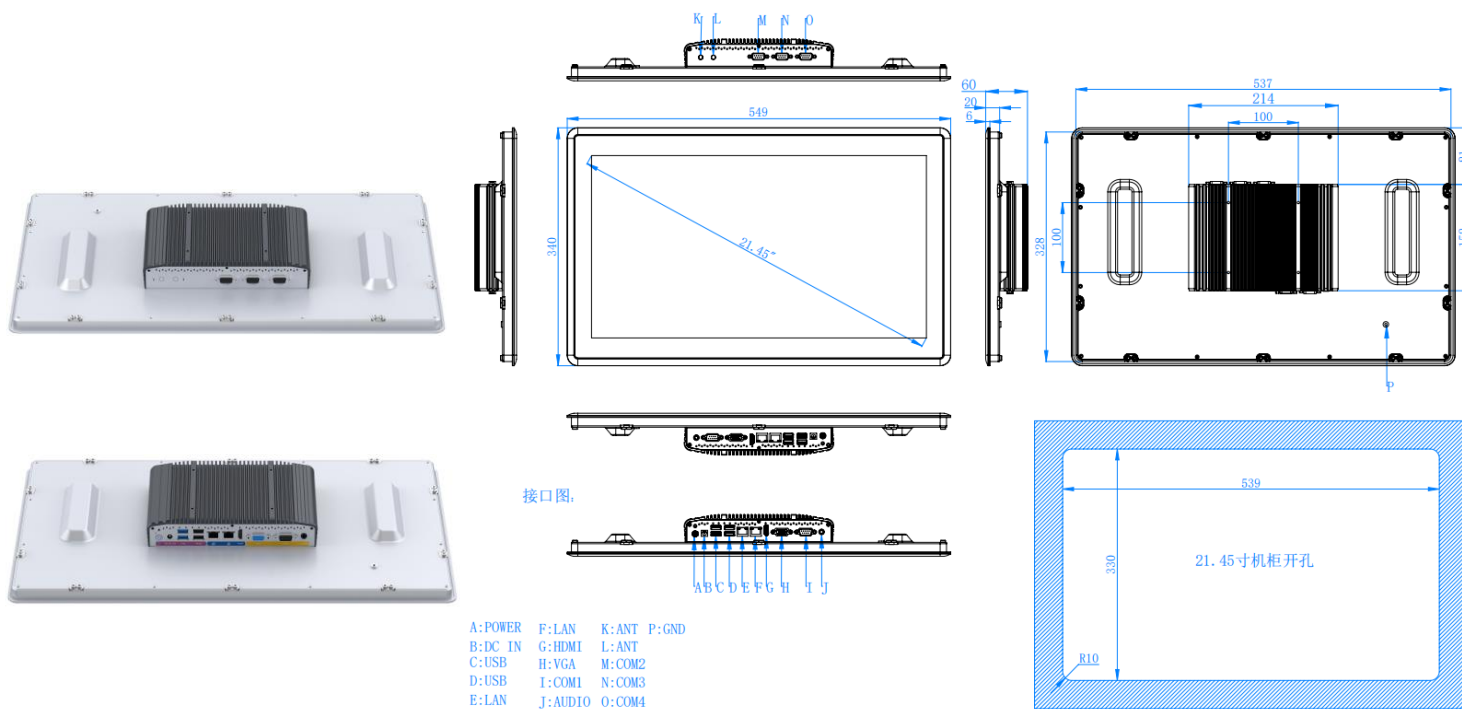

■ 订购信息

产品名称	描述
KMX6-E101-XXX-8G-128G	10.1" /Intel CPU /8G内存 /128硬盘 /4× RS232(COM1可调RS485) /2 × LAN /4 x USB3.0 /电容触摸屏/分辨率1280*800/ DC12V电源输入
KMX6-E121-XXX-8G-128G	12.1" /Intel CPU /8G内存 /128硬盘 /4× RS232(COM1可调RS485) /2 × LAN /4 x USB3.0 /电容触摸屏/分辨率1024*768/ DC12V电源输入
KMX6-E150-XXX-8G-128G	15" /Intel CPU /8G内存 /128硬盘 /4× RS232(COM1可调RS485) /2 × LAN /4 x USB3.0 /电容触摸屏/分辨率1024*768/ DC12V电源输入
KMX6-E156-XXX-8G-128G	15.6" /Intel CPU /8G内存 /128硬盘 /4× RS232(COM1可调RS485) /2 × LAN /4 x USB3.0 /电容触摸屏/分辨率1920*1080/ DC12V电源输入
KMX6-E170-XXX-8G-128G	17" /Intel CPU /8G内存 /128硬盘 /4× RS232(COM1可调RS485) /2 × LAN /4 x USB3.0 /电容触摸屏/分辨率1280*1024/ DC12V电源输入
KMX6-E215-XXX-8G-128G	21.5" /Intel CPU /8G内存 /128硬盘 /4× RS232(COM1可调RS485) /2 × LAN /4 x USB3.0 /电容触摸屏/分辨率1920*1080/ DC12V电源输入

■ 选配件

配件	描述
4G套件	4G/3G模块(可选EC20,EC25,EG25..) Mini-PCIe
DDR4内存	8GB,16GB,32GB
M.2 2242/2280 硬盘	128GB,256GB,512GB...