

KMX8000-C194-B-L&L5

有风扇

特点:

- 19" SXGA TFT 1280 x 1024
- 3网口/5网口可选
- 多点电容式触摸屏
- 支持Intel® Core™ 10-11代处理器
- 支持DC12V-24V±10%输入
- 支持嵌入式安装&VESA支架安装




规格参数:



产品名称		KMX8000-C194-B-L	KMX8000-C194-B-L5
硬件配置	CPU	Intel® Core™ 10-11代i5/i3 CPU type LGA1200 . Max.65W	
	芯片	H510	
	内存	2 x DDR4-2666/3200 MHz, 最大支持32GB	
	存储	1 x M.2 (M Key 2280 PCIe Gen3 x 4 Lane) 1 x mSATA	
I/O 接口	网络	3 x Intel 1000Mbps RJ-45	5 x Intel 1000Mbps RJ-45
	USB	4 x USB3.0 + 2 x USB2.0	
	串口	4 x RS-232 / RS-485 接口带浪涌保护	
	I/O接口	8DI+8DO 湿接点输入 (24V) , OC 门输出 (24V 500mA)	
	HDMI	1920x1080 60Hz	
	扩展槽	1 x Mini-PCIe slot, 可扩展 4G / WIFI	
	重量	6.5kg	
物理特性	安装方式	嵌入式&VESA安装	
	尺寸 (W x H x D)	460mm * 369mm * 74mm	
	开孔尺寸 (W x H)	442mm * 351mm	
操作系统	OS	Windows 7, Windows8, Windows10, Linux	
电源	输入电压	DC 12-24V±10% 支持反接、过流、过压保护	
	最小功耗	22W	
液晶屏	尺寸	19" SXGA TFT	
	分辨率	1280 x 1024	
	背光 MTBF (小时)	30000hrs	
	亮度	250cd/m2	
	对比度	1000:1	
	视角	(L) 85 / (R) 85 / (T) 80 / (B) 80	
触摸屏	触摸屏类型	多点电容式触摸屏	
	透光率	> 87%	
	控制器	USB	
环境参数	工作温度	-0 ~ 50°	
	存储温度	-20 ~ 60°	
	相对湿度	5~95% (40°无凝结)	
	振动	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis	
	冲击	SSD applied: 10 G, IEC 60068-2-27, 半正弦波, 持续 11ms	
	EMC	CE/FCC Class B	
	防水	前面板IP65 防护等级	

尺寸与定义 (unit: mm)

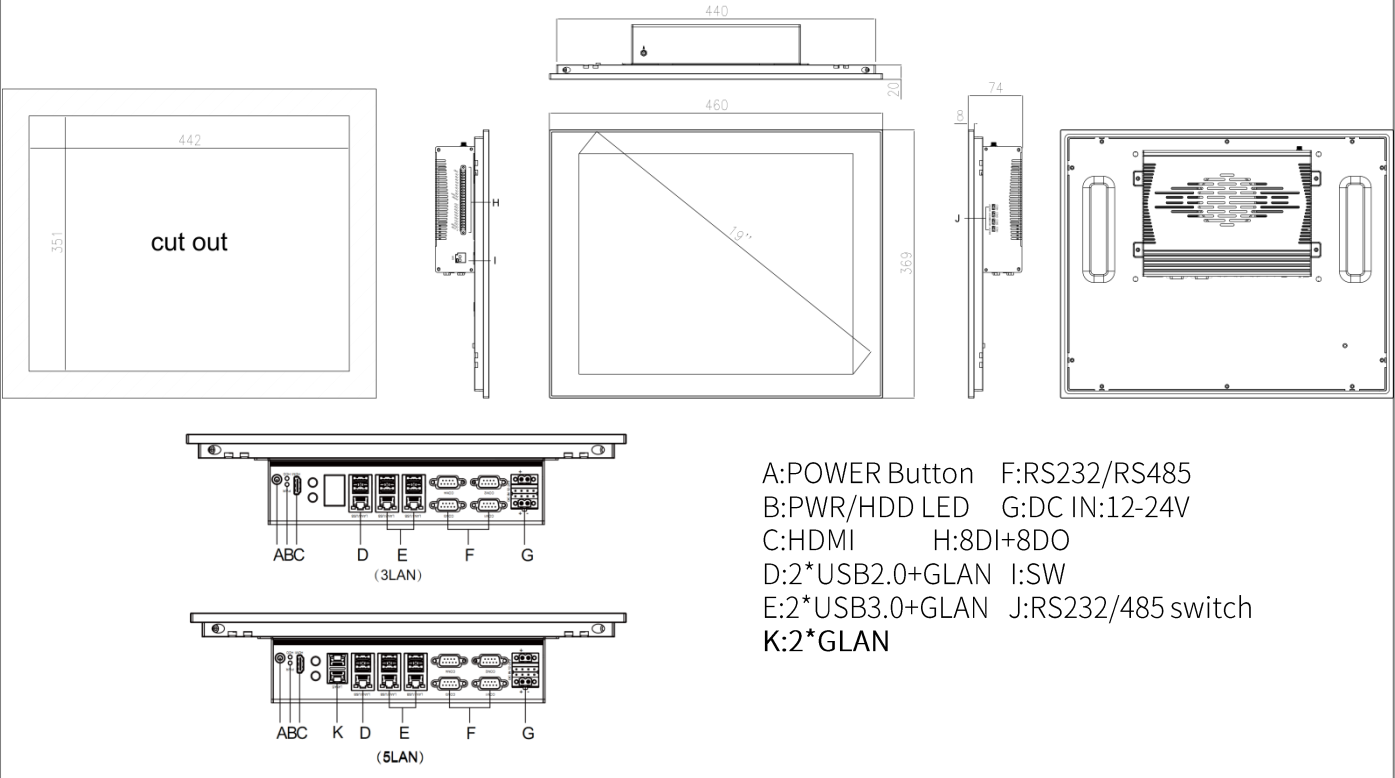

订购指南

KMX8000-C194-XXXX	描述
KMX8000-C194-B-L	19 “LCD,1280 x 1024, 4 x 串口(RS232/485可选), 3 x GLAN, 6 x USB, 8DIO, DC12~24V输入。
KMX8000-C194-B-L5	19 “LCD,1280 x 1024, 4 x 串口(RS232/485可选), 5 x GLAN, 6 x USB, 8DIO, DC12~24V输入。

附件选配

料号	规格
CPU	Support 10th/11th generation Intel® Core™ i3/i5 LGA 1200 socket type processors Intel® Core™i5-11400T,Six Cores,1.30 GHz,12 MB Cache; Intel® Core™i5-11500T,Six Cores,1.50 GHz,12 MB Cache; Intel® Core™i5-10400T,Six Cores,2.00 GHz,12 MB Cache; Intel® Core™i5-10500T,Six Cores,2.30 GHz,12 MB Cache; Intel® Core™i5-11400,Six Cores,2.60 GHz,12 MB Cache; Intel® Core™i5-11500,Six Cores,2.70 GHz,12 MB Cache; Intel® Core™i5-10400,Six Cores,2.90 GHz,12 MB Cache; Intel® Core™i5-10500,Six Cores,3.10 GHz,12 MB Cache; Please contact sales to check other request.
内存	DDR4 4G/8G/16G
存储	Mini SATA SSD 64G/128G/256G/512G/1TB
存储	M.2 SSD 128GB,256GB,512GB,1TB,2TB
WIFI	miniPCIE WIFI Kit(7260 Series), Cylindrical Antenna
4G 模块	mini PCIE,EC20.EG25.EC25