KMX-304A-F302

海光 HG3350 Processor based Wall-Mounted Industrial PC



Features:


- 海光 HG3350 Processor
- Dual Channel UDIMM DDR4 up to 64GB
- 1x HDMI (Via Expansion GPU)
- 1x M.2_2280, supports NVMe/SATA SSD, 1 or 2 SATA3.0 for 2.5"/3.5" SSD/HDD
- 2x GbE LAN, 1x Mini PCIe for GPU/Wi-Fi/BT
- 1x PCIe X16 slot, 2x PCIe X8 slot, 1x PCIe X1 slot
- 2x COM, 10x USB
- Single AC 220V power input (AC 110V Optional)







Dimensions

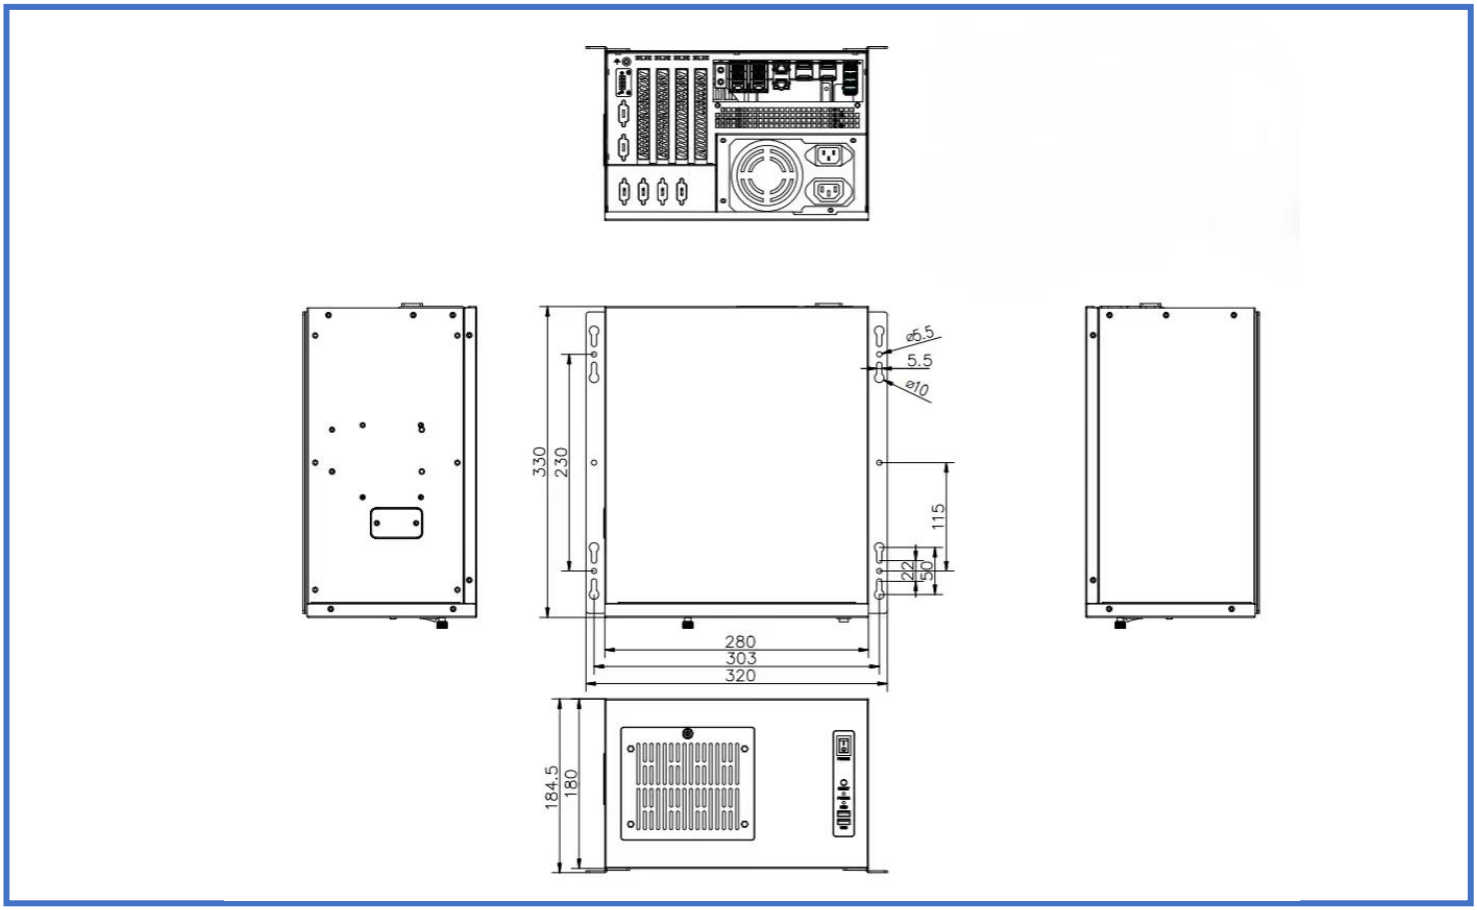


KMX-304A-F302


Specifications:

Processor System	CPU	HG3350
Memory	Technology	Dual channel DDR4 3200 MHz
	Max capacity	64GB
	Socket	4x UDIMM 288Pin
Graphics	Chipset	Expansion GPU, Mini PCIe or PCIe slot
Ethernet	Controller	LAN 1/2: Intel® Ethernet I210 or RTL8111/YT6801
	Speed	LAN 1/2: 10/100/1000 Mbps
Expansion	Mini PCIe	1x Mini PCIe slot for GPU/Wi-Fi/BT
	PCIe x16 (Gen4)	1x FH/HL (X8/X16 Link)
	PCIe x8 (Gen4)	1x FH/HL (X8/NA Link)
	PCIe x8 (Gen3)	1x FH/HL (X4/X8 Link)
	PCIe x1 (Gen3)	1x FH/HL (X1 Link)
Storage	Drive Bay	1/2x SATA3.0 for 1/2x 2.5" SSD/HDD or 1x 2.5" SSD/HDD + 1x 3.5" SSD/HDD
	M.2	1x M.2_2280 slot for NVMe/SATA SSD
Rear I/O	Display	1x HDMI (Via Expansion GPU)
	RJ-45	2
	USB	2x USB3.0, 6x USB2.0
	Serial	1x RS-232, 1x RS232/422
	Audio	Line_out, Mic_in
	Optional	8x RS-232, 15bit GPIO, VGA
Front I/O	USB 2.0	2
	Control & LED Indicators	ON/OFF Button, Reset, Power LED, HDD LED
Power Requirement	Power Input Voltage	Single AC 220V power input (AC 110V Optional)
Environment	Operating Temp.	0 ~ 50℃ (32 ~ 122°F)
	Storage Temp.	-20℃ ~ 60℃ (-4°F ~ 140°F)
	Relative Humidity	10-95% @40℃ (non-condensing)
Other	OS	KOS, UOS, Windows, Linux
	Dimensions (W x H x D)	320 x 184.5 x 330 mm

KMX-304A-F302

External I/O

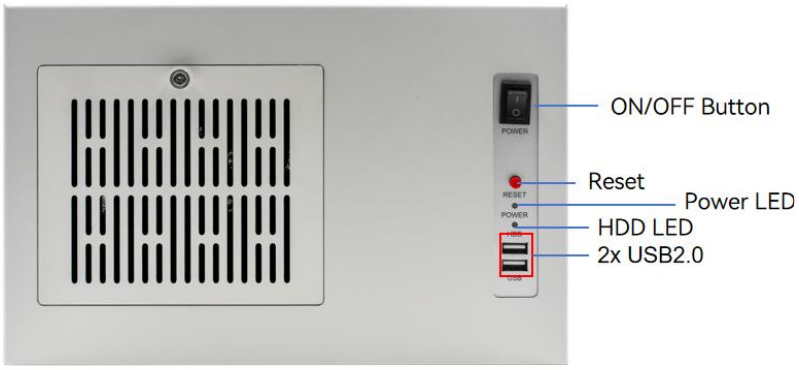

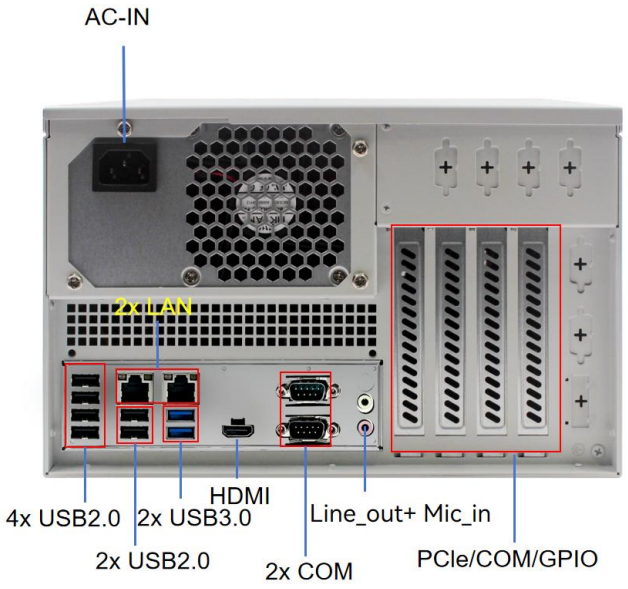

Ordering Information:

Part Number	Product Name	Description
	KMX-304A-F302	KMX-304A OTM-F302 10USB 2LAN 2COM ATX

Packing List:

Part Number	Description
	1x KMX-304A-F302 Unit

Option Items:

Part Number	Description
	Wi-Fi Module
	COM port cable
	VGA cable